



BOBTAIL

PROVEN DESIGN


PROFESSIONAL INSTALLATION

MANUFACTURE WARRANTY

ENDLESS OPTIONS

BUILT READY FOR WORK

"Ride With Quality"

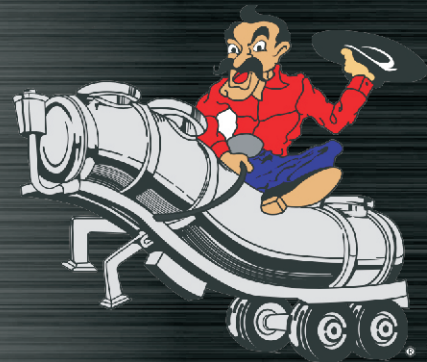

KINGSVILLE, TEXAS

800.864.4887

SPECIFICATIONS

SHELL:	72" I.D.X14'X1/4" STRAIGHT CYLINDER, SA-36 MILD STEEL.
HEADS:	72" O.D.X1/4" FLANGED AND DISHED, SA-36 MILD STEEL.
BAFFLES:	TWO 72" OD FLARED AND DISHED SURGE STYLE BAFFELS.
STIFFENING RINGS:	THREE 3/8"X2 1/2" FLAT BAR TYPE.
MANWAYS:	THREE 20" HINGED TYPE MANWAY WITH SIX GREASEABLE WING NUT STYLE LATCHES.
VACUUM KITS:	PORTAL SHUTOFF CONSISTING OF A 6" STAINLESS STEEL FLOAT BALL WITH RUBBER SEAT INSTALLED IN 12" PORTAL PLUMBED INTO THE OUTSIDE SCRUBBER.
PLUMBING:	TWO 4" INLET/OUTLETS INSTALLED AT THE BOTTOM REAR OF THE WITH 4" WAFER STYLE BUTTERFLY VALVES, BOTH HAVE ALUMINUM MALE CAM LOCKS WITH DUST CAPS.
FENDERS:	COMBINATION HOSE RACK AND FENDERS, SLEEK PROCO FENDERS KEEPS HOSES TOWARD TANK. DRAINS IN FENDERS HAVE 1" CONNECTION FOR BALL VALVE. COMES WITH TWO HANGERS ON REAR HEAD.
LEVEL GAUGE:	ONE 2 3/8" CLEAR SIGHT GLASS MOUNTED ON REAR HEAD WITH 2" BALL VALVES AND CLEANOUT TEES ON TOP AND BOTTOM. OPTIONAL INTERNAL FLOAT BALL LEVEL GAUGE.
BUMPER:	COMBINATION REAR STEP USING 8"X4" HEAVY BOX TUBING BUMPER C/W LIGHT GUARDS.
LIGHTS:	12 VOLT <u>LED</u> LIGHT SYSTEM TO COMPLY TO FEDERAL SAFETY STANDARDS #108. LED GROTE LIGHTS IN "ULTRA-BLUE SEAL" HARNESS SYSTEM. DOUBLE HALOGEN WORK LIGHT, STROBE LIGHT.
TOOL BOX:	HEAVY DUTY 18"X18"X36" WITH LOCKABLE SEALED DOOR MOUNTED ON DRIVER SIDE.
FRAME:	4" BOX TUBING PADDED TO TRUCK FRAME.
PAINT:	SANDBLAST, PRIME, AND PAINT ONE COLOR (CUSTOMERS CHOICE) USING URETHANE PAINT.
LINER:	SANDBLAST INSIDE OF TANK AND APPLY TNEMEC 141 LINER.
CATWALK:	12" WIDE X 14' LONG GALVANIZED WALKWAY SQUARE TUBING HANDRAILS RUNNING FULL LENGTH WITH CENTER LADDER. WALKWAY WILL BE MOUNTED AT 9 O'CLOCK DRIVER'S SIDE.

Proco will customize to your specifications.

