



Trailboss
ACID KILL TRAILER

PROVEN DESIGN


DRIVER FRIENDLY

DOT 407/412

A.S.M.E.

BUILT READY FOR WORK

"Ride With Quality"

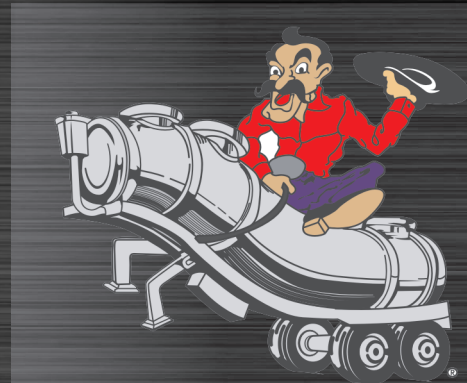

KINGSVILLE, TEXAS

800.864.4887

SPECIFICATIONS

SHELL:	60" I.D.X36'X1/4" STRAIGHT CYLINDER, SA-36 MILD STEEL.
HEADS:	60" O.D.X1/4" ASME FLANGED AND DISHED, SA-36 MILD STEEL. DOUBLE HEADS DIVIDING TANK INTO TWO COMPARTMENTS, 40BBL FRONT AND 90BBL REAR.
BAFFLES:	NONE.
STIFFENING RINGS:	EIGHT 3/8"X2½" FLAT BAR TYPE.
MANWAYS:	THREE 20" HINGED TYPE MANWAY WITH SIX GREASEABLE WING NUT STYLE LATCHES.
VACUUM KITS:	NONE.
PLUMBING:	ONE 4" AIR ACTUATED BUTTERFLY INLET/OUTLET AT REAR OF EACH COMPARTMENT WITH FOUR 4" MANUAL SECONDARY WAFER STYLE BUTTERFLY VALVES WITH VITON SEATS, WITH 4" BRASS QUICK CONNECTS AND DUST CAPS; ONE ON REAR, ONE ON FRONT AND ONE ON FRONT LEFT AND RIGHT SIDE.
PIPE RACK:	ONE MOUNTED UNDER PASSENGER SIDE FENDER, ONE JUNK BASKET FROM EXPANDED STEEL AND CHICKSAN RACK.
VENT:	ONE 2' 180 AIR ACTUATED BUTTERFLY VALVE VENT IN EACH COMPARTMENT.
ROLLOVERS:	4 DOT ROLL OVER PROTECTORS, PIPE STYLE.
FENDERS:	COMBINATION HOSE RACK AND FENDERS, SLEEK PROCO FENDERS KEEPS HOSES TOWARD TANK. DRAINS IN FENDERS HAVE 1" CONNECTION FOR BALL VALVE.
LEVEL GAUGE:	OPTIONAL LEVEL INDICATOR.
BUMPER:	COMBINATION REAR STEP USING 8"X4" HEAVY BOX TUBING BUMPER C/W LIGHT GUARDS.
LIGHTS:	12 VOLT <u>LED</u> LIGHT SYSTEM TO COMPLY TO FEDERAL SAFETY STANDARDS #108. LED GROTE LIGHTS IN "ULTRA-BLUE SEAL" HARNESS SYSTEM. DOUBLE HALOGEN WORK LIGHT, STROBE LIGHT.
TOOL BOX:	HEAVY DUTY 18"X18"X36" WITH LOCKABLE SEALED DOOR MOUNTED ON DRIVER SIDE.
LANDING GEAR:	TWO SPEED CRANK UP STYLE WITH SANDSHOES.
FRAME:	1/4" FORMED FULL LENGTH L-TYPE FRAME.
SUSPENSION/AXLES:	OPTIONS: SINGLE POINT, 4 SPRING HUTCH 9700, AIR RIDE 25,000# CAPACITY AXLES, STEMCO SEALS, AUTOMATIC SLACK ADJUSTERS, OUTBOARD DRUMS, ABS BRAKES
TIRES:	STEEL BELTED RADIALS 11R24.5 TIRES. 10 HOLE HUB PILOT STEELS WHEELS
PAINT:	SANDBLAST, PRIME, AND PAINT ONE COLOR (CUSTOMERS CHOICE) USING URETHANE PAINT.
LINER:	SANDBLAST INSIDE OF TANK AND APPLY TNEMEC 391 LINER, OR FRP.
CATWALK:	12" WIDE X 36" LONG GALVANIZED WALKWAY SQUARE TUBING HANDRAILS RUNNING FULL LENGTH WITH CENTER LADDER. WALKWAY WILL BE MOUNTED AT 9 O'CLOCK DRIVER'S SIDE.

Proco will customize to your specifications.

