



130 BBL RANGER

PROVEN DESIGN


DRIVER FRIENDLY

LOW MAINTENANCE

LOW PROFILE FOR STABILITY

BUILT READY FOR WORK

"Ride With Quality"

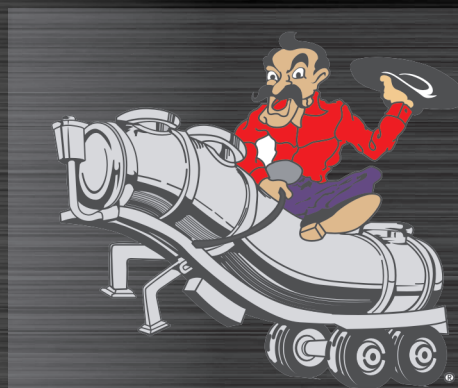

KINGSVILLE, TEXAS

800.864.4887

SPECIFICATIONS

SHELL:	60" I.D.X36'X1/4" STRAIGHT CYLINDER, SA-36 MILD STEEL.
HEADS:	60" O.D.X1/4" FLANGED AND DISHED, SA-36 MILD STEEL.
BAFFLES:	TWO 1/4" FLARED AND DISHED SURGE STYLE BAFFLES.
STIFFENING RINGS:	SEVEN 3/8"X2 1/2" FLAT BAR TYPE.
MANWAYS:	THREE 20" HINGED TYPE MANWAY WITH SIX GREASEABLE WING NUT STYLE LATCHES.
VACUUM KITS:	ONE 12" OUTSIDE SCRUBBER WITH 6" STAINLESS STEEL FLOAT BALL. 30/60 VACUUM/PRESSURE GAUGE ON REAR HEAD. INSIDE PORTAL SHUTOFF IN 20" MANWAY WITH STAINLESS FLOAT BALL AND BUNA SEAT.
PLUMBING:	TWO 4" OUTLETS WITH 4" WAFER STYLE BUTTERFLY VALVES WITH BUNA SEATS; ONE 4" AND ONE 3" ALUMINUM QUICK CONNECT C/W DUST CAP, 2" RELIEF VALVE, AND 2" BLOW DOWN LINE.
FENDERS:	COMBINATION HOSE RACK AND FENDERS, SLEEK PROCO FENDERS KEEPS HOSES TOWARD TANK. DRAINS IN FENDERS HAVE 1" CONNECTION FOR BALL VALVE.
LEVEL GAUGE:	2 3/8" CLEAR SIGHT GLASS MOUNTED ON REAR HEAD WITH 2" BRASS BALL VALVES TOP AND BOTTOM, WITH CLEAN OUT TEES.
BUMPER:	COMBINATION REAR STEP USING 8"X4" HEAVY BOX TUBING BUMPER C/W LIGHT GUARDS.
LIGHTS:	12 VOLT <u>LED</u> LIGHT SYSTEM TO COMPLY TO FEDERAL SAFETY STANDARDS #108. LED GROTE LIGHTS IN "ULTRA-BLUE SEAL" HARNESS SYSTEM. DOUBLE HALOGEN WORK LIGHT, STROBE LIGHT.
TOOL BOX:	HEAVY DUTY 18"X18"X36" WITH LOCKABLE SEALED DOOR MOUNTED ON DRIVER SIDE.
LANDING GEAR:	TWO SPEED CRANK UP STYLE WITH SANDSHOES.
FRAME:	1/4" FORMED FULL LENGTH L-TYPE FRAME.
SUSPENSION/AXLES:	OPTIONS: SINGLE POINT, 4 SPRING HUTCH 9700, AIR RIDE 25,000# CAPACITY AXLES, STEMCO SEALS, AUTOMATIC SLACK ADJUSTERS, OUTBOARD DRUMS, ABS BRAKES
TIRES:	STEEL BELTED RADIALS 11R24.5 TIRES. 10 HOLE HUB PILOT STEELS WHEELS
PAINT:	SANDBLAST, PRIME, AND PAINT ONE COLOR USING URETHANE PAINT.
LINER:	SANDBLAST INSIDE OF TANK AND APPLY TNEMEC LINER.
CATWALK:	12" WIDE X 36" LONG GALVANIZED WALKWAY SQUARE TUBING HANDRAILS RUNNING FULL LENGTH WITH CENTER LADDER. WALKWAY WILL BE MOUNTED AT 9 O'CLOCK DRIVER'S SIDE.

Proco will customize to your specifications.

